

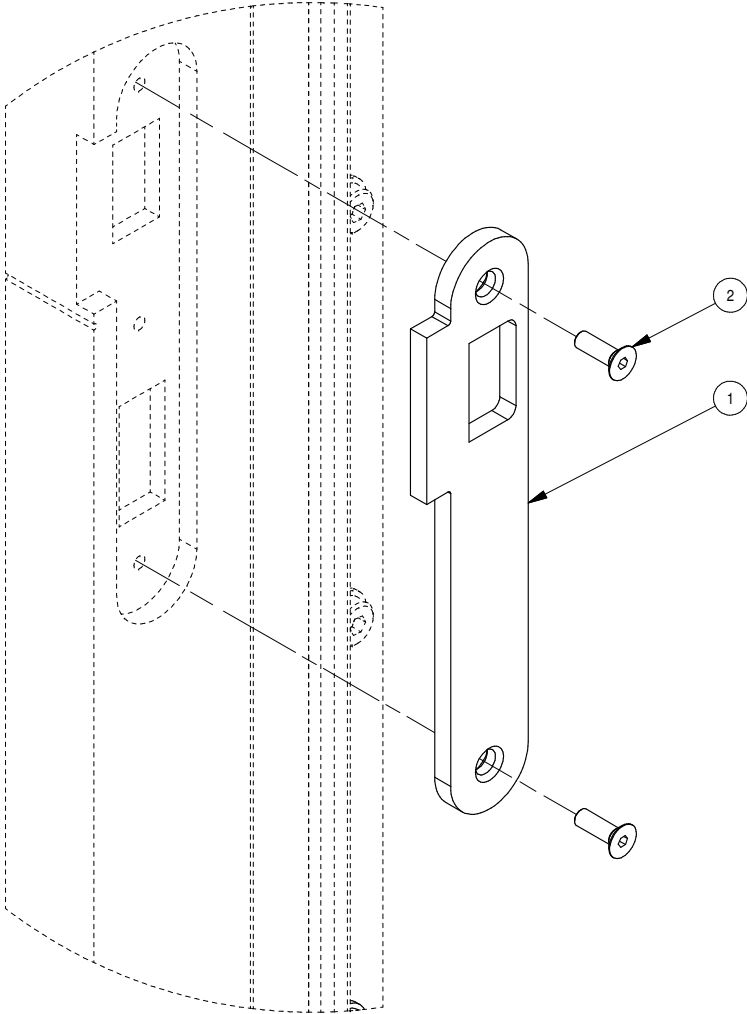



Pre installation manual


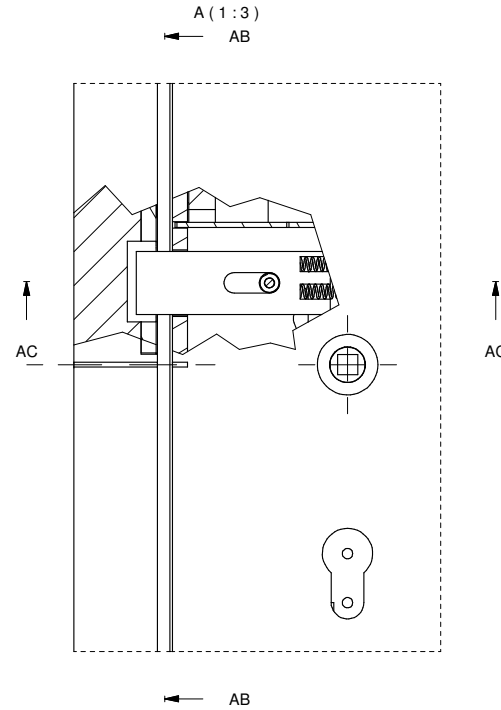


2	2	DIN 7991 - M5 x 16	Hexagon Socket Countersunk Head Cap Screw
1	1	23_25-044	Strike Plate Pre
Item	Qty	Part number	Description
 De Vor Metaalbewerking B.V. Handelsweg 5 3481MJ Harmelen Tel: +31 (0)348 40 16 36 info@devorddoorsandhatches.nl www.devorddoorsandhatches.nl			Sheet: 1/2 
Document name: Wet dog Pocket_HL00_PRE			Scale: 1 : 2
Creation date: 8-10-2020			Sheet size: A4
Revision:			Unit: MM
Description:			
Weathertight Dummy Strike Plate Assembly Pre			
EXCLUSIVE COPYRIGHT BY DE VOR METAALBEWERKING B.V. THIS DRAWING MAY NOT BE COPIED WITHOUT APPROVAL FROM DE VOR METAALBEWERKING B.V. OR BE HANDED TO ANY OTHER PARTY			

Pre strike plate variations

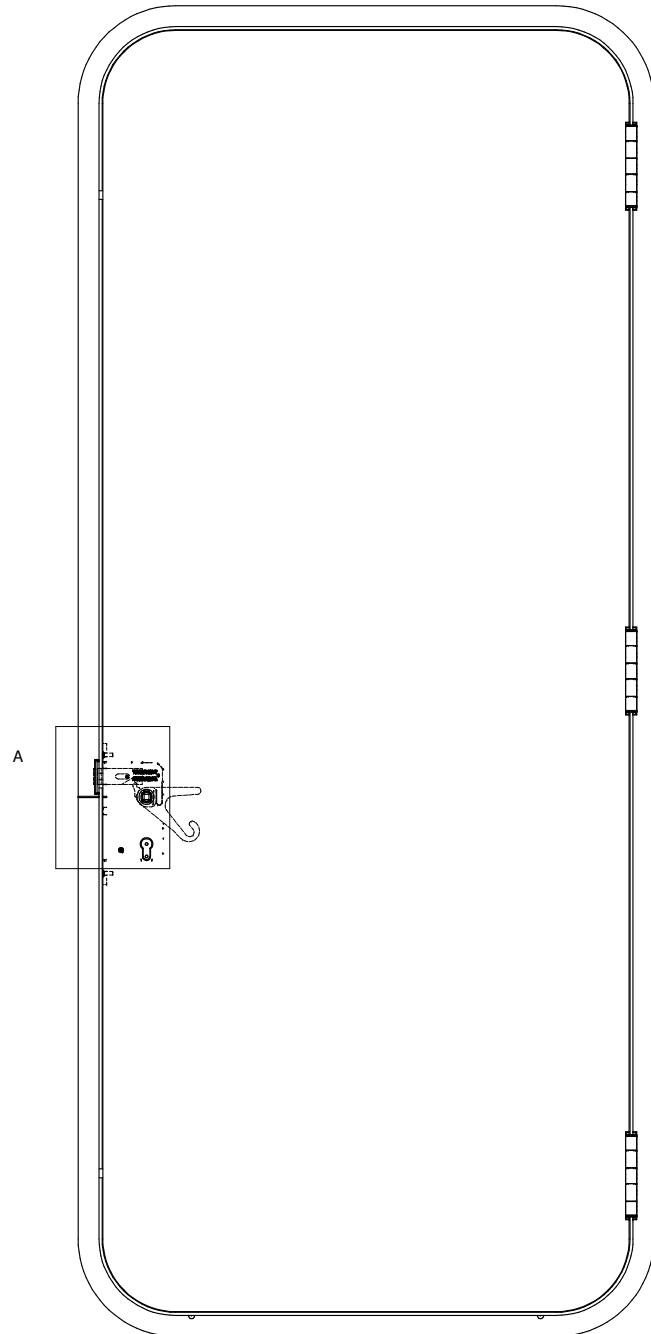


AB-AB (1:3)

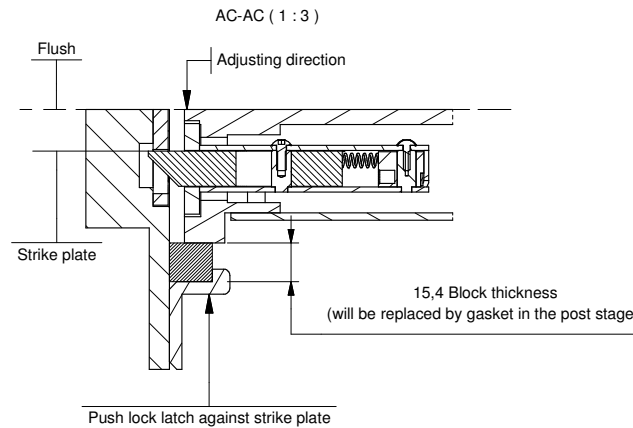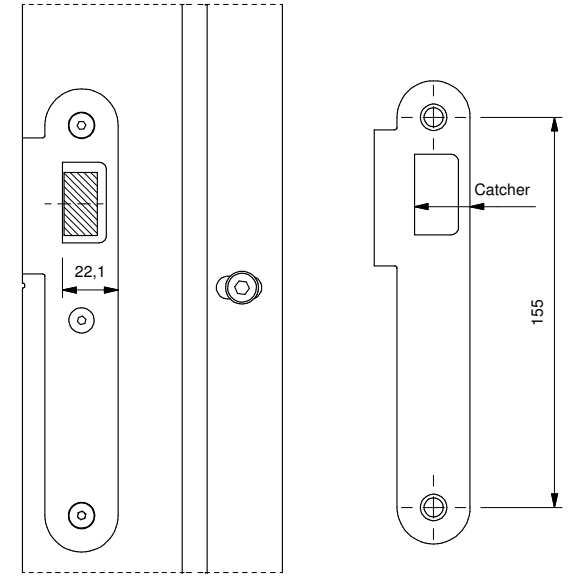

Strike plate

1. Push lock latch against strike plate
2. Select a strike plate to make the door flush with the coaming or inside the coaming AC-AC
3. Retain door by adjusting the gasket carrier (with the blocks) against the door and bolting it in place.

Strike plate variations (Item 1)			
Part number	Description	Size	Extra Size
23_25-044	Strike Plate Pre	Catcher 22,1	HOH 155
23_25-044_-1	Strike Plate Pre -1	Catcher 21,1	HOH 155
23_25-044_-2	Strike Plate Pre -2	Catcher 20,1	HOH 155
23_25-044_-3	Strike Plate Pre -3	Catcher 19,1	HOH 155

 De Vor Metaalbewerking B.V. Handelsweg 5 3481MJ Harmelen Tel: +31 (0)348 40 16 36 info@devordoorsandhatches.nl www.devordoorsandhatches.nl	Sheet: 2/2 
	Document name: Wet dog Pocket_HL00_PRE Creation date: 8-10-2020 Revision: Description:

Scale: 1 : 12
Sheet size: A4
Unit: MM

Weathertight Dummy Strike Plate Assembly Pre

EXCLUSIVE COPYRIGHT BY DE VOR METAALBEWERKING B.V. THIS DRAWING MAY NOT BE COPIED WITHOUT APPROVAL FROM DE VOR METAALBEWERKING B.V. OR BE HANDED TO ANY OTHER PARTY